


PG707X - 4000 LUMENS XGA NETWORKABLE PROJECTOR WITH 1.3X OPTICAL ZOOM AND LOW INPUT LAG

Key Features

- High brightness 4000 Lumens XGA projector with advanced visual features
- 1.3x optical zoom lens, H/V keystone and corner adjustment for flexible setup
- SuperEco Mode allows the lamp to shine bright for up to 20,000 hours
- 6 segment color wheel and dynamic lamp control capabilities provide vivid colors
- A low 16ms input latency provides faster frame-by-frame action for smooth images without delay
- Supports most media players, PCs, Macs, and mobile devices with inputs such as Dual HDMI, USB, Ethernet LAN

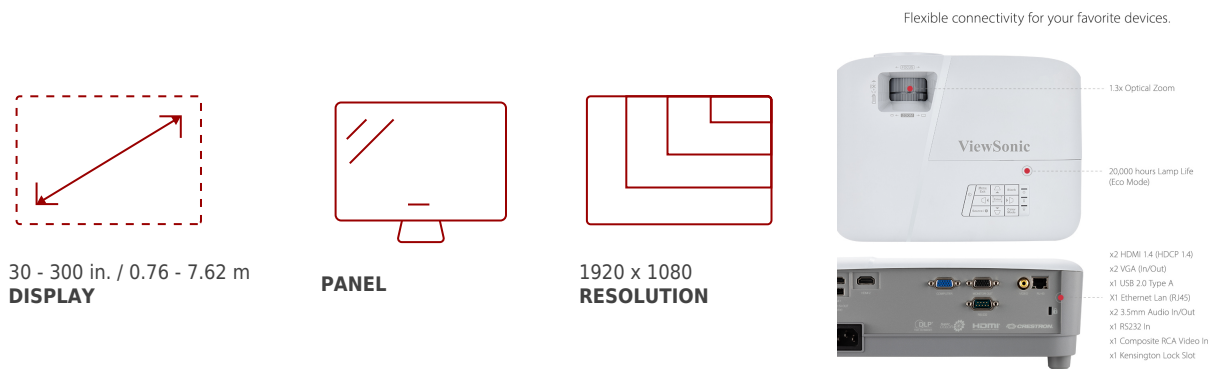

Product Description

The ViewSonic® PG707X projector features 4,000 lumens, XGA 1024x768 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. An energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours. A 10W speaker delivers incredibly clear and audible sound, while a top lamp door enables easy access for lamp maintenance. The PG707X is the ideal high brightness projector for use in both classroom and corporate settings.

Specifications

	More Information
UPC	766907006193
Light Source	DLP Lamp
Display Resolution	XGA (1024x768)
Display Resolution	1024 x 768
Brightness (Lumens)	4,000 ANSI
Screen Size	30 - 300 in. / 0.76 - 7.62 m

Throw Distance	3.0 - 39.4 ft / .9 - 12.0 m
Throw Ratio	1.51-1.97
Keystone	Vertical (+/- 40°) / Horizontal (+/- 40°)
Lens	1.3x optical zoom
Light Source (watt)	203
Light Source Life, Normal (hours)	6000
Light Source Life, Dynamic Eco-Mode (hours)	20000
Color Depth	1.07 Billion Colors
Dynamic Contrast Ratio	22,000:1
Aspect Ratio	4:3
Input Lag	37ms
Frequency Horizontal	15K~105KHz
PC Resolution (max)	1920 x 1080
PC Resolution (min)	640 x 480
Mac® Resolution (max)	1920 x 1080
Mac® Resolution (min)	640 x 480
USB 2.0 Type A	1
Ethernet LAN (RJ45)	1
3.5mm Audio Out	1
3.5mm Audio In	1
Control (RS232)	1
HDMI 1.4 (with HDCP 1.4)	2
VGA In	1
VGA Out	1
Composite RCA Video In	1
Internal Speakers	10W (x1)
Voltage	100-240V +/- 10%, 50/60Hz AC
Consumption (typical)	280W
Stand-by	<0.5W
Physical Controls	Keypad, Power key
On Screen Display	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
Temperature	32-104° F (0 - 40° C)
Kensington Lock Slot	1
Net (lbs)	5.3
Gross (lbs)	7.5


Net (kg)	2.4
Gross (kg)	3.6
Packaging (in.)	16.3 x 6.6 x 11.7
Physical (in.)	11.6 x 8.6 x 4.3
Packaging (mm)	415.0 x 168.0 x 297.0
Physical (mm)	294.0 x 218.0 x 110.0
Regulations	cTUVus
Package Contents	PG707X projector, power cable, VGA cable, remote control, Quick Start Guide,
Warranty	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.

UPC: 766907006193



Projection Distance and Size

Where to place your projector to get the screen size you want.



Projection Distance (ft.)

*Based on throw ratio of 1.51:1.97

**Can project up to 76 m | 300 in.

4000 LUMENS and XGA (1024x768) RESOLUTION



Contact Sales
ViewSonic.com

888.881.8781 ☎

email:

salesinfo@viewsonic.com