

PX701-4K-S


Key Features

REFURBISHED


- Stunning 4K Ultra HD Resolution
- HDR Content Support
- Responsive Gameplay
- Bright Images in Any Environment
- Huge Screen Size for Less Cost
- Long Lamp Life




Where to place your projector
to get the screen size you want.




30 - 300 in. / 0.76 - 7.62 m
DISPLAY



PANEL



3840 x 2160
RESOLUTION

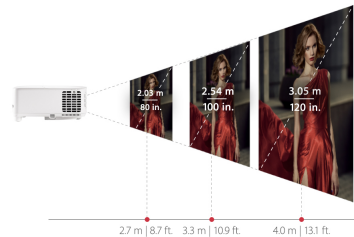

Projection Distance

*Based on throw ratio of 1.5-1.65

**Can project up to 762 m | 300 in.

*** Ceiling Mountable

Product Description

For an incredible entertainment experience from the comfort of home, the ViewSonic® PX701-4K projector delivers stunning Ultra HD resolution at an affordable price. While true 4K resolution and HDR support make this projector ideal for movie watching, users will enjoy its low 4.2ms input lag and 240Hz refresh rate for casual gaming. With 3200 lumens and room-filling sound, this projector provides bright visuals and immersive audio in nearly any room or environment. An automatic horizontal and vertical keystone feature, along with four-corner adjustment, delivers flexible setup of image sizes up to 300 inches.

Specifications

More Information


UPC

766907012408

Light Source	DLP Lamp
Display Resolution	4K (3840x2160)
Display Resolution	3840 x 2160
Brightness (Lumens)	3,200 ANSI
Screen Size	30 - 300 in. / 0.76 - 7.62 m
Throw Distance	1m~10.96m (100"@3.32m)
Throw Ratio	1.5-1.65
Keystone	Vertical (+/- 40°) / Horizontal (+/- 40°)
Lens	1.1x optical zoom
Light Source (watt)	203
Light Source Life, Normal (hours)	6000
Light Source Life, Dynamic Eco-Mode (hours)	20000
Color Depth	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio	12,000:1
Aspect Ratio	16:9
Input Lag	37ms
Frequency Horizontal	15K-129KHz
Frequency Vertical	23-240Hz
PC Resolution (max)	3840 x 2160
PC Resolution (min)	640 x 480
Mac® Resolution (max)	3840 x 2160
Mac® Resolution (min)	640 x 480
USB 2.0 Type A	1
3.5mm Audio Out	1
RS232 Out	1
HDMI 2.0 In	2
Internal Speakers	10W (x1)
Voltage	100-240V+/- 10%, 50/60Hz AC
Consumption (typical)	290W
Stand-by	<0.5W
Physical Controls	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	0-90%
Kensington Lock Slot	1

Net (lbs)	6.2
Gross (lbs)	8.8
Net (kg)	2.8
Gross (kg)	4
Packaging (in.)	16.3 x 6.6 x 11.7
Physical (in.)	12.3 x 4.3 x 8.7
Packaging (mm)	415.0 x 168.0 x 297.0
Physical (mm)	312.0 x 108.0 x 222.0
Regulations	FCC, cTUVus, ROHS
Package Contents	PX701-4K, power cable, remote control, Quick Start Guide
Warranty	*Refurbished. 30-day DOA policy for full refund, with a 90-day repair warranty on parts and labor.
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Classification	Refurbished

UPC: 766907012408

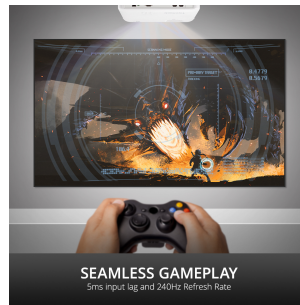

Contact Sales
ViewSonic.com
 888.881.8781
 email:
salesinfo@viewsonic.com