

## IFP7552-1TAA - 75" TAA COMPLIANT 4K TOUCH ENABLED VIEWBOARD SMART DISPLAY

### Key Features

---


- Intuitive and Ultra-Responsive Touchscreen
- Front-Facing Soundbar
- Built-in Beamforming Microphone
- USB-C with Power Delivery
- myViewBoard Manager




75  
**DISPLAY**



**PANEL**



**RESOLUTION**

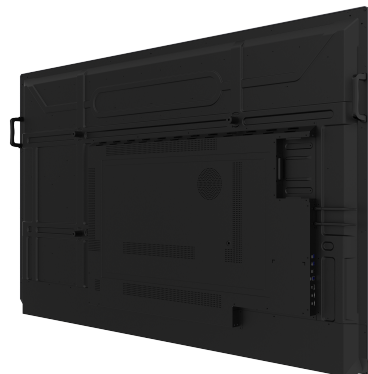

### Product Description

---

The ViewSonic® ViewBoard® IFP7552-1TAA is a TAA compliant 75" interactive flat panel display with next-generation whiteboard technologies ideal for collaboration in government environments, mission-critical meeting rooms or interactive huddle spaces. With a high-accuracy touchscreen and intelligent palm recognition technology, the IFP7552-1TAA delivers an intuitive digital whiteboard experience. Featuring 4K Ultra HD resolution, a powerful 45W stereo soundbar and microphone array, this ViewBoard display delivers optimal images and sound for everyone in the meeting room as well those calling in remotely. With the integrated myViewBoard™ software ecosystem, this ViewBoard display enables easy content sharing and interactive presentations.

### Specifications

---

<b>UPC</b>	766907015591
<b>OS</b>	ViewBoard OS based on Android 9.0
<b>GPU</b>	ARM Mali-G52
<b>CPU</b>	ARM Quad Core A73
<b>CPU Processor Speed</b>	1.8GHz
<b>Memory</b>	4GB LPDDR4
<b>Storage</b>	32GB eMMC
<b>Microphone</b>	Beamforming array x 8, noise cancelation
<b>Internal Speakers</b>	15W (x2)
<b>Subwoofer</b>	15W (x1)
<b>HDMI 2.0 In</b>	3
<b>HDMI Out</b>	1
<b>VGA</b>	1
<b>DisplayPort</b>	1
<b>SPDIF</b>	1
<b>USB 3.0</b>	4
<b>USB 2.0</b>	1
<b>USB 2.0 Type B</b>	2
<b>USB 3.1 Type C</b>	1
<b>OPS PC Slot</b>	1
<b>RS232</b>	1
<b>Ethernet LAN (RJ45)</b>	1
<b>Intel® OPS Slot In (80-pin)</b>	1
<b>Line In</b>	1
<b>Voltage</b>	100-240 VAC
<b>Consumption (max)</b>	400W
<b>Consumption (typical)</b>	200W
<b>Stand-by</b>	<0.5W
<b>Temperature</b>	32-104° F (0 - 40° C)
<b>Humidity (non-condensing)</b>	10-80%
<b>Touch Technology</b>	Slim IR
<b>Touch Points</b>	Windows: 33, Android: 20
<b>Tip Detection</b>	Dual tips: 2mm and 8mm, Finger: 10-15mm, Palm: 30mm
<b>Other</b>	Palm recognition, object awareness
<b>Latency</b>	4ms
<b>Net (lbs)</b>	125.1

<b>Gross (lbs)</b>	159.0
<b>Net (kg)</b>	56.8
<b>Gross (kg)</b>	72.1
<b>Packaging (in.)</b>	74.0 x 45.7 x 11.0
<b>Physical (in.)</b>	67.7 x 42.1 x 4.7
<b>Packaging (mm)</b>	1880.0 x 1160.0 x 280.0
<b>Physical (mm)</b>	1720.1 x 1069.6 x 118.4
<b>VESA Compatible</b>	800 x 400 mm
<b>Screw Size</b>	M8
<b>Warranty</b>	3-year limited warranty on parts, labor and backlight, onsite warranty
<b>Recycle/Disposal</b>	Please dispose of in accordance with local, state or federal laws.
<b>Package Contents</b>	IFP7552-1TAA display, stylus pen x 2, power cable, HDMI cable, USB cable, AV cable, remote control with batteries, Camera plate, M8 screw x 8, Quick Start Guide
<b>Regulations</b>	cTUVus, FCC, ENERGY STAR, EPEAT Silver, Mexico Energy, CE, CB, RoHS, ErP, WEEE
<b>Ethernet LAN</b>	(10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)
<b>Display Type</b>	LCD
<b>Screen Size</b>	75
<b>Viewable Area (in.)</b>	74.5
<b>Light Source</b>	LED
<b>Display Resolution</b>	3840 x 2160
<b>Refresh Rate</b>	60Hz
<b>Aspect Ratio</b>	16:9
<b>Static Contrast Ratio</b>	1,200:1
<b>Dynamic Contrast Ratio</b>	4,000:1
<b>Backlight Life (Hours)</b>	50,000
<b>Brightness</b>	400 cd/m2
<b>Response Time (Typical GTG)</b>	8ms
<b>Viewing Angles</b>	178° horizontal, 178° vertical
<b>Panel Surface</b>	Anti-glare 7H tempered glass 3.2mm

UPC: 766907015591



#### Contact Sales

[ViewSonic.com](http://ViewSonic.com)

888.881.8781

email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)