


## VX2716A - 27" 1080P 1MS 120HZ (OC) IPS GAMING MONITOR WITH USB-C

## Key Features

- React faster with a 120hz refresh rate and a 1ms (MPRT) response time
- Streamlined USB-C connectivity (signal only)
- · Smoother gameplay with variable refresh rate technology
- Flexible connectivity options including HDMI 1.4, DisplayPort, USB-C and audio out
- Blue light filter lets users play for longer with less eyestrain



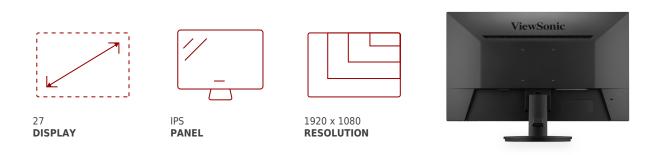

## Product **Description**

Whether you're a weekend warrior or a casual competitor, the 27" ViewSonic® VX2716a is the perfect gaming monitor for players looking to switch up the way they play. Fully immerse yourself in virtual worlds with features like stunning Full HD resolution, a rapid-fire 120Hz overclock (OC) refresh rate and 1ms response time. Enveloping dual-integrated stereo speakers help level up gaming from a hobby to an experience, while versatile connectivity options such as HDMI, DisplayPort and USB-C (signal only) make the VX2716a the ideal display for both work and play.

## **Specifications**

More Information

UPC

766907027440

Screen Size	27
Viewable Area (in.)	27
Panel Type	IPS
<b>Display Resolution</b>	1920 x 1080
<b>Display Resolution</b>	Full HD (1920x1080)
Static Contrast Ratio	1,300:1
Dynamic Contrast Ratio	80,000,000:1
Light Source	LED
Brightness	300 cd/m2
Colors	16.7M
Color Space Support	6 bit + FRC
Aspect Ratio	16:9
Response Time (Typical GTG)	4ms
Response Time (MPRT)	lms
Viewing Angles	178º horizontal, 178º vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Refresh Rate	120Hz
PC Resolution (max)	1920 x 1080
Mac® Resolution (max)	1920 x 1080
USB Type C	1
3.5mm Audio Out	1
HDMI 1.4 In	1
DisplayPort	1
Internal Speakers	2W (x2)
Eco Mode (Conserve)	16W
Eco Mode (optimized)	19W
Consumption (typical)	26W
Consumption (max)	30W
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5W
Power Supply	Internal
Cable Organization	No
Kensington Lock Slot	1
Physical Controls	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

Temperature	32-104º F (0 - 40º C)	
Humidity (non-condensing)	20-90%	
VESA Compatible	100 x 100 mm	
Frequency Horizontal	30 ~ 138 KHz	
Frequency Vertical	48 ~ 120 Hz	
Tilt (Forward/Back)	5º / 22º	
Net (lbs)	10.5	
Net Without Stand (lbs)	9.7	
Gross (lbs)	13.7	
Net (kg)	4.8	
Net Without Stand (kg)	4.4	
Gross (kg)	6.2	
Packaging (in.)	27.1 " (W) x 18.2 " (H) x 4.9 " (D)	
Physical (in.)	24.1 " (W) x 17.1 " (H) x 8.9 " (D)	
Physical Without Stand (in.)	24.1 " (W) x 14.4 " (H) x 1.9 " (D)	
Packaging (mm)	688 mm (W) x 463 mm (H) x 125 mm (D)	
Physical (mm)	611.5 mm (W) x 434.4 mm (H) x 226.1 mm (D)	
Physical Without Stand (mm)	611.5 mm (W) x 365.76 mm (H) x 47.6 mm (D)	
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, NOM, Mexico Energy, CB	
Package Contents	LCD Display, Power Cable, HDMI Cable, Quick Start Guide	
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.	
Warranty	Three-year limited warranty on parts, labor and backlight	
UPC: 766907027440	UPC: 766907027440	







**Contact Sales** ViewSonic.com 888.881.8781 a email:

salesinfo@viewsonic.com