


# PG707X - 4000 LUMENS XGA NETWORKABLE PROJECTOR WITH 1.3X OPTICAL ZOOM AND LOW INPUT LAG

## Key Features

- High brightness 4000 Lumens XGA projector with advanced visual features
- 1.3x optical zoom lens, H/V keystone and corner adjustment for flexible setup
- SuperEco Mode allows the lamp to shine bright for up to 20,000 hours
- 6 segment color wheel and dynamic lamp control capabilities provide vivid colors
- A low 16ms input latency provides faster frame-by-frame action for smooth images without delay
- Supports most media players, PCs, Macs, and mobile devices with inputs such as Dual HDMI, USB, Ethernet LAN

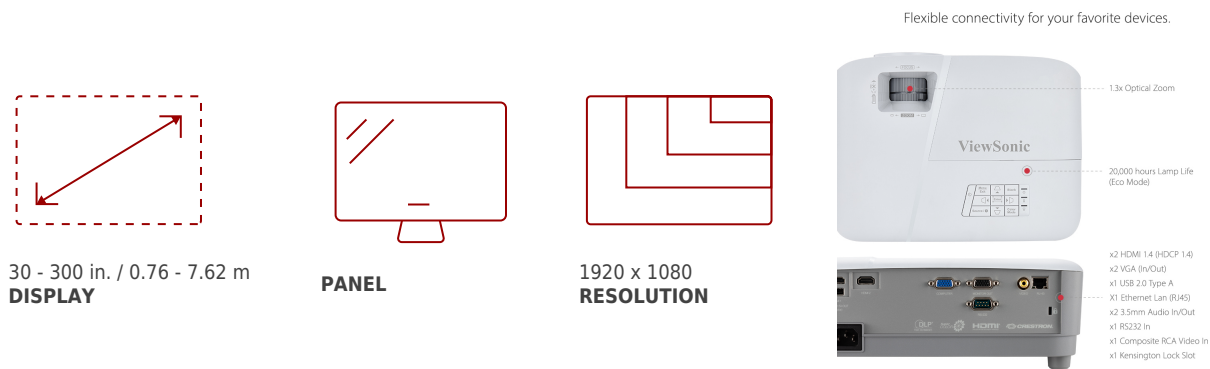

## Product Description

The ViewSonic® PG707X projector features 4,000 lumens, XGA 1024x768 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. An energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours. A 10W speaker delivers incredibly clear and audible sound, while a top lamp door enables easy access for lamp maintenance. The PG707X is the ideal high brightness projector for use in both classroom and corporate settings.

## Specifications

	More Information
<b>UPC</b>	766907006193
<b>Light Source</b>	DLP Lamp
<b>Display Resolution</b>	XGA (1024x768)
<b>Display Resolution</b>	1024 x 768
<b>Brightness (Lumens)</b>	4,000 ANSI
<b>Screen Size</b>	30 - 300 in. / 0.76 - 7.62 m


<b>Throw Distance</b>	3.0 - 39.4 ft / .9 - 12.0 m
<b>Throw Ratio</b>	1.51-1.97
<b>Keystone</b>	Vertical (+/- 40°) / Horizontal (+/- 40°)
<b>Lens</b>	1.3x optical zoom
<b>Light Source (watt)</b>	203
<b>Light Source Life, Normal (hours)</b>	6000
<b>Light Source Life, Dynamic Eco-Mode (hours)</b>	20000
<b>Color Depth</b>	1.07 Billion Colors
<b>Dynamic Contrast Ratio</b>	22,000:1
<b>Aspect Ratio</b>	4:3
<b>Input Lag</b>	37ms
<b>Frequency Horizontal</b>	15K~105KHz
<b>PC Resolution (max)</b>	1920 x 1080
<b>PC Resolution (min)</b>	640 x 480
<b>Mac® Resolution (max)</b>	1920 x 1080
<b>Mac® Resolution (min)</b>	640 x 480
<b>USB 2.0 Type A</b>	1
<b>Ethernet LAN (RJ45)</b>	1
<b>3.5mm Audio Out</b>	1
<b>3.5mm Audio In</b>	1
<b>Control (RS232)</b>	1
<b>HDMI 1.4 (with HDCP 1.4)</b>	2
<b>VGA In</b>	1
<b>VGA Out</b>	1
<b>Composite RCA Video In</b>	1
<b>Internal Speakers</b>	10W (x1)
<b>Voltage</b>	100-240V +/- 10%, 50/60Hz AC
<b>Consumption (typical)</b>	280W
<b>Stand-by</b>	<0.5W
<b>Physical Controls</b>	Keypad, Power key
<b>On Screen Display</b>	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
<b>Temperature</b>	32-104° F (0 - 40° C)
<b>Kensington Lock Slot</b>	1
<b>Net (lbs)</b>	5.3
<b>Gross (lbs)</b>	7.5

<b>Net (kg)</b>	2.4
<b>Gross (kg)</b>	3.6
<b>Packaging (in.)</b>	16.3 x 6.6 x 11.7
<b>Physical (in.)</b>	11.6 x 8.6 x 4.3
<b>Packaging (mm)</b>	415.0 x 168.0 x 297.0
<b>Physical (mm)</b>	294.0 x 218.0 x 110.0
<b>Regulations</b>	cTUVus
<b>Package Contents</b>	PG707X projector, power cable, VGA cable, remote control, Quick Start Guide,
<b>Warranty</b>	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
<b>Recycle/Disposal</b>	Please dispose of in accordance with local, state or federal laws.

UPC: 766907006193



**Projection Distance and Size**  
Where to place your projector to get the screen size you want.



4000 LUMENS and XGA (1024x768) RESOLUTION



**Contact Sales**  
[ViewSonic.com](http://ViewSonic.com)

888.881.8781 ☎  
email:  
[salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)