


LS831WU - 4500 LUMENS WUXGA ULTRA SHORT THROW LASER PROJECTOR WITH HV KEYSTONE AND 4 CORNER ADJUSTMENT

Key Features

- · High brightness 4500 Lumens WUXGA laser projector with 0.25 ultra short throw and advanced visual features
- · Long-lasting laser phosphor light source allows the lamp to shine bright for up to 20,000 hours
- 0.25 ultra short throw ratio, HV keystone, 4 corner adjustments and 360 degree projection
- · Schedule, and manage the projector remotely with Crestron, AMX, Extron, PJ Link, ATEN, and ViewSonic's vController
- Supports most media players, PCs, Macs, and mobile devices with inputs such as HDMI, USB and Ethernet LAN

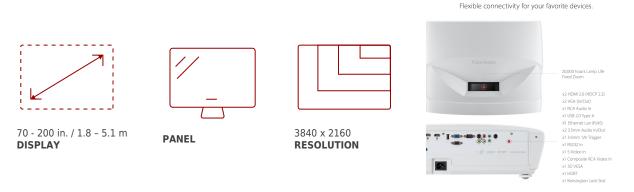

Product **Description**

Featuring stunning WUXGA resolution and 4,500 lumens of brightness, the ViewSonic® LS831WU Laser Projector is the ideal solution for modern business and education environments. Designed with a laser phosphor light source lasting up to 20,000 hours, this projector delivers long-term, virtually maintenance-free usage for any boardroom or classroom. With its 0.25 ultra-short throw ratio, HV keystoning and 4 corner adjustments, the LS831WU makes installation a hassle-free experience. What's more, the ultra-short throw ratio allows you to place the projector just inches away from a wall or screen to give you a huge image for less cost than a comparably sized display. Powered by SuperColor technology for true-to-life images, and SonicExpert® technology for incredibly clear sound, the LS831WU delivers an immersive audiovisual performance.

Specifications

More Information		
UPC	766907005448	
Light Source	Laser	
Display Resolution	WUXGA (1920x1200)	
Display Resolution	1920 x 1200	
Brightness (Lumens)	4,500 ANSI	
Screen Size	70 - 200 in. / 1.8 - 5.1 m	

Throw Distance	0.2 - 2.4 ft / 0.1 - 0.7 m
Throw Ratio	0.252
Keystone	Vertical (± 5º) / Horizontal (± 5º)
Light Source (watt)	67W X 2
Light Source Life, Normal (hours)	20000
Color Depth	1.07 Billion Colors
Dynamic Contrast Ratio	3,000,000:1
Aspect Ratio	16:10
Input Lag	37ms
Frequency Horizontal	15K~102KHz
Frequency Vertical	23~120Hz
PC Resolution (max)	3840 x 2160
PC Resolution (min)	640 x 480
Mac® Resolution (max)	3840 x 2160
Mac® Resolution (min)	640 x 480
USB 2.0 Type A	1
Ethernet LAN (RJ45)	1
3.5mm 12V Trigger	1
3.5mm Audio Out	1
3.5mm Audio In	1
Control (RS232)	1
HDMI 2.0 (with HDCP 2.2)	2
VGA In	1
VGA Out	1
Composite RCA Video In	1
S-Video In	1
RCA Audio In (L/R)	1
3D VESA	1
HDBT	1
Internal Speakers	10W (x2)
Voltage	100-240V+/- 10%, 50/60Hz AC
Consumption (typical)	504W
Stand-by	<0.5W
Physical Controls	Keypad, Power key
On Screen Display	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Temperature	32-104º F (0 - 40º C)
Net (lbs)	21.8
Gross (lbs)	28.8
Net (kg)	9.9
Gross (kg)	13.1
Packaging (in.)	25.7 x 21.2 x 11.6
Physical (in.)	19.3 x 15.2 x 6.1
Packaging (mm)	645.0 x 540.0 x 295.0
Physical (mm)	492.0 x 387.0 x 157.0
Regulations	FCC, cTUVus
Package Contents	LS831WU projector, power cable, VGA cable, remote control, Quick Start Guide,
Warranty	Three-year limited warranty on parts and labor, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.

UPC: 766907005448





4500 Lumens and WUXGA (1920X1200) Resolution



Contact Sales
ViewSonic.com
888.881.8781 email:
salesinfo@viewsonic.com