


VX3267U-2K - 32" 1440P IPS MONITOR WITH 65W USB-C, HDMI, DP AND HDR10

Key Features


- 32 inch QHD (2560x1440p) IPS monitor with thin bezels
- USB-C connectivity for fast data, audio and video transfer and 65W charging over a single cable
- HDR10 content support for deep contrast, rich colors and vibrant details
- Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- The VX3267U-2K supports laptops, PCs, and Macs with USB-C, HDMI and DisplayPort inputs




32
DISPLAY



IPS
PANEL



2560 x 1440
RESOLUTION

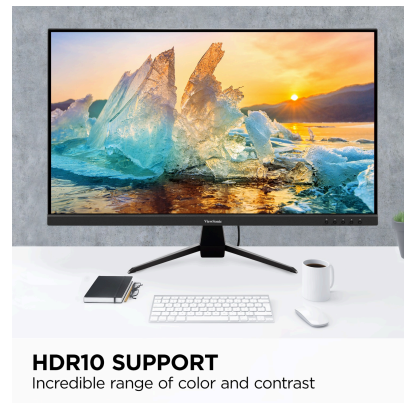

HDR10 SUPPORT
Incredible range of color and contrast

Product Description

Whether you're looking to work with greater clarity or experience entertainment in a whole new light, the ViewSonic® VX3267U-2K 32" monitor takes your viewing experience to a new level of immersion. This 2K monitor uses state-of-the-art IPS panel technology to deliver stunning visuals with ultra-wide viewing angles. Enjoy 2560 x 1440 resolution on a bezel-free, ultra-wide display for an edge-to-edge viewing experience unlike anything you've ever seen. Immerse yourself in vibrant true-to-life colors and enhanced contrast thanks to HDR10 content support. This powerful home office monitor features USB 3.2 Type-C connectivity for video, audio, data and up to 65W of charging power over a single cable. Connect additional devices via HDMI and DisplayPort inputs.

Specifications

UPC	766907021035
Screen Size	32
Viewable Area (in.)	31.5
Panel Type	IPS
Display Resolution	2560 x 1440
Display Resolution	QHD (2560x1440)
Static Contrast Ratio	1,200:1
Dynamic Contrast Ratio	50,000,000:1
Light Source	LED
Brightness	250 cd/m2
Colors	1.07B
Color Space Support	10 Bit
Aspect Ratio	16:9
Response Time (Typical GTG)	4ms
Viewing Angles	178° horizontal, 178° vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-glare, Hard coating (3H)
Refresh Rate	75Hz
PC Resolution (max)	2560 x 1440
Mac® Resolution (max)	2560 x 1440
USB Type C	65W x 1
3.5mm Audio Out	1
HDMI 1.4 In	1
DisplayPort	1
Internal Speakers	2.5W (x2)
Eco Mode (Conserve)	20W
Eco Mode (optimized)	24W
Consumption (typical)	28W
Consumption (max)	42W
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5W
Power Supply	External
Cable Organization	No
Kensington Lock Slot	1
Physical Controls	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	HDMI: 31 ~ 115 KHz, DisplayPort: 31 ~ 115 KHz, USB Type C: 31 ~ 115 KHz
Frequency Vertical	HDMI: 48 ~ 76 Hz, DisplayPort: 48 ~ 76 Hz, USB Type C: 48 ~ 76 Hz
Digital Sync	TMDS for HDMI, PCI-E for DP / Mini DP
Tilt (Forward/Back)	5° / 20°
Net (lbs)	15.0
Net Without Stand (lbs)	13.6
Gross (lbs)	20.3
Net (kg)	6.8
Net Without Stand (kg)	6.2
Gross (kg)	9.2
Packaging (in.)	30.2 x 20.1 x 4.9
Physical (in.)	28.1 x 19.6 x 9.2
Physical Without Stand (in.)	28.1 x 16.8 x 2.3
Packaging (mm)	766.0 x 510.0 x 125.0
Physical (mm)	714.0 x 499.0 x 232.0
Physical Without Stand (mm)	714.0 x 427.0 x 59.0
Regulations	cTUVus, FCC-B with ICES003, MX-CoC, Mexico Energy
Package Contents	VX3276-2K-mhd Display, Power Cable, HDMI Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight

UPC: 766907021035



Contact Sales
ViewSonic.com
 888.881.8781
 email:
salesinfo@viewsonic.com