




VG2449 - 24" 1080P ERGONOMIC MONITOR WITH HDMI, DISPLAYPORT, VGA, AND DAISY CHAIN

Key Features

- 24 Inch Full HD (1920x1080p) LED monitor with 60Hz refresh rate
- Advanced ergonomics (tilt, swivel, rotate and height) for all-day comfort
- Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- Optimized view settings offers "Game," "Movie," "Web," "Text," and "Mono" presets
- The VG2449 supports laptops, PCs, Macs and more with HDMI, DisplayPort (Daisy Chain) and VGA inputs

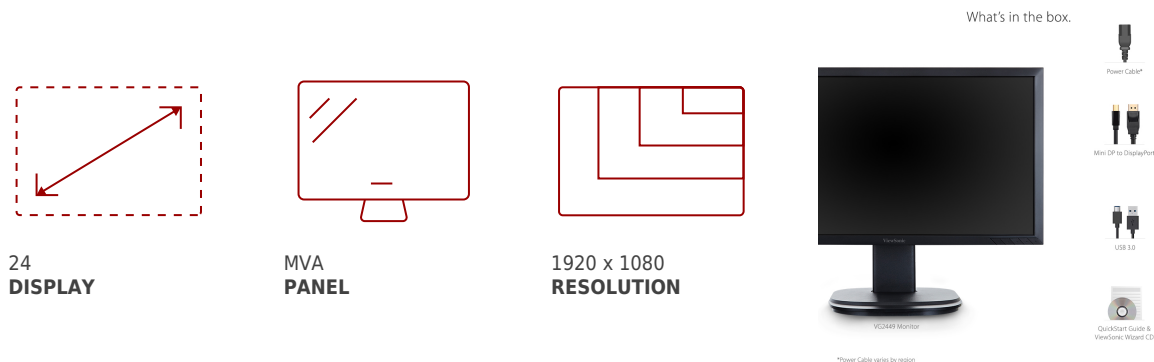

Product Description


With future-proof connectivity and advanced ergonomics, the ViewSonic® VG2449 is a productivity-boosting monitor perfect for corporate, government, and education environments. Designed with both a DisplayPort input and output, this monitor delivers easy, single-cable daisy-chaining of multiple monitors for increased productivity. With SuperClear® MVA panel technology for wide-angle viewing, and a 20M:1 dynamic contrast ratio, incredibly sharp images and vivid color remain consistent across multiple daisy-chained screens. For maximum comfort and a customized fit, a robust fully ergonomic stand gives you tilt, pivot, swivel, and height-adjustable options. Additional connectivity options include VGA, HDMI, and Mini DisplayPort so that you can connect to a variety of high-definition and analog devices – today and tomorrow.

Specifications

	More Information
UPC	766907853513
Screen Size	24
Viewable Area (in.)	23.6
Panel Type	MVA
Display Resolution	1920 x 1080
Static Contrast Ratio	3,000:1
Dynamic Contrast Ratio	20M:1
Light Source	LED
Brightness	250 cd/m2
Colors	16.7M
Aspect Ratio	16:9
Response Time (Typical GTG)	7ms
Viewing Angles	178º horizontal, 178º vertical
Backlight Life (Hours)	40,000
Panel Surface	Anti-glare, hard-coating (3H)
PC Resolution (max)	1920 x 1080
Mac® Resolution (max)	1920 x 1080
USB Type A	2
USB Type B	1
VGA	1
HDMI 1.4 In	1
DisplayPort	1
DisplayPort Out	1
Mini DisplayPort	1
Internal Speakers	2W (x2)
Eco Mode (Conserve)	14W
Eco Mode (optimized)	16W
Consumption (typical)	20
Consumption (max)	46
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5W
Cable Organization	No
Kensington Lock Slot	1

Physical Controls	1,2, Up, Down, Power
On Screen Display	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	Analog: 24 ~ 82KHz. Digital: 15 ~ 82KHz
Frequency Vertical	Analog: 50 ~ 75Hz. Digital: 50 ~ 75Hz
Analog Sync	Separate Sync / Composite Sync / Sync on Green , TMDs, PCI-E
Height Adjust	135 mm / 5.3 in
Swivel	360º
Pivot (Right/Left)	90º / 0º
Tilt (Forward/Back)	6º / 25º
Net (lbs)	11.1
Net Without Stand (lbs)	7.9
Gross (lbs)	15.1
Net (kg)	5.1
Net Without Stand (kg)	3.6
Gross (kg)	6.9
Packaging (in.)	25.0 x 20.0 x 7.5
Physical (in.)	22.1 x 17x1 x 9.4
Physical Without Stand (in.)	22.1 x 13.1 x 2.3
Packaging (mm)	634.0 x 508.0 x 190.0
Physical (mm)	560.3 x 435.2 x 239.6
Physical Without Stand (mm)	560.3 x 332.7 x 58.2
Regulations	cULus, FCC, ICES003, Energy Star 7.0, EPEAT, UL-MX-CoC, Mexico Energy, RoHS Green BOM & RoHS DoC
Package Contents	VG2449 Display, Power Cable, Mini DP to DP Cable, USB 3.0 Upstream Cable, Quick Start Guide, ViewSonic Wizard CD-ROM
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.

UPC: 766907853513

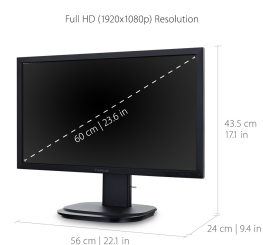

Contact Sales
ViewSonic.com
888.881.8781
email: salesinfo@viewsonic.com