


LDP216-251 - 216" ALL-IN-ONE PREMIUM FULL HD DIRECT VIEW LED DISPLAY

Key Features


- Seamlessly Immersive
- Versatile Installation Orientation
- Super-Sized Video Walls
- Amazing Visuals
- Theater-Level Audio
- Simple and Easy Setup
- Peace of Mind
- Device Management Made Easy
- Wireless Content Sharing
- Easy Maintenance

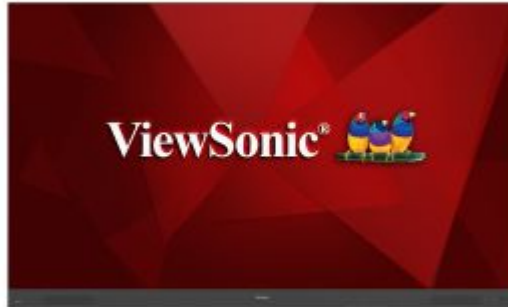


216
DISPLAY



Fine Pixel Pitch LED
PANEL



1920x1080
RESOLUTION

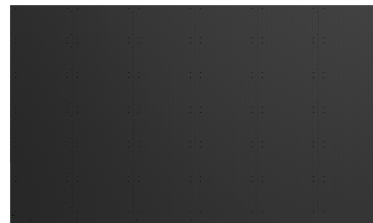

Product Description



The ViewSonic® LDP216-251 All-in-One Direct View LED Display is a premium 216" larger-than-life digital screen that delivers an incredible audio-visual experience for any high-end corporate lobby, boardroom or conference room. Featuring a 120% Rec. 709 wide color gamut, lightning-fast 3,840Hz refresh rate, and a peak brightness of 600 nits, this display delivers true-to-life color and extraordinary detail for every video, presentation and lecture. The display is also equipped with Harman Kardon speakers, 4K/HDR/HLG support and PIP/PBP display modes for immersive content delivery. At 25mm slim and lined with a 5mm frameless edge, the sleek LDP216-251 exudes sophistication and elegance in any modern setting.

Specifications

| | |
|-------------------------------|--------------------------------|
| UPC | 766907014976 |
| Display Type | Direct View LED |
| Screen Size | 216 |
| Viewable Area (in.) | 216 |
| Light Source | Fine Pixel Pitch LED |
| LED Pitch Size (mm) | 2.5 |
| LED Grayscale | 14 bits |
| Display Resolution | 1920 x 1080 |
| Refresh Rate | 4,440Hz |
| Panel Type | Fine Pixel Pitch LED |
| Aspect Ratio | 16:9 |
| Static Contrast Ratio | 6,000:1 |
| Backlight Life (Hours) | 100,000 |
| Brightness | 600-nit |
| Viewing Angles | 160° horizontal, 160° vertical |
| Operation Rating | 24/7 |
| Wifi | 2.4G / 5G n |
| OS | Android 9.0 |
| Media Player Type | Yes |
| CPU | MTK9669 |
| Memory | 4GB DDR4 |
| Storage | 64GB (56GB available) |
| Internal Speakers | 20W (x2) |
| PC Resolution (max) | 1920x1080 |
| Mac® Resolution (max) | 1920x1080 |
| HDMI 1.4 In | 2 |
| HDMI 2.0 In | 3 |
| HDMI 2.1 In | 1 |
| HDMI 2.0 Out | 2 |
| 3.5mm Audio In | 1 |
| 3.5mm Audio Out | 1 |
| USB 2.0 | 3 |
| RS232 | 1 |
| Ethernet LAN (RJ45) | 1 |
| HDBaseT | 1 |
| IR in | 1 |

| | |
|---------------------------------------|---|
| Intel® OPS Slot In (80-pin) | 1 |
| Voltage | 100-120V/30A~ 50/60Hz or 220-240V/15A~ 50Hz(vary by country) |
| Consumption (max) | 4900W |
| Consumption (typical) | 3430W |
| Stand-by | <0.5W |
| On Screen Display | Yes |
| Remote Control | Yes |
| Temperature | 32-104° F (0 - 40° C) |
| Humidity (non-condensing) | 20-80% |
| Net (lbs) | 640 |
| Gross (lbs) | 883 |
| Net (kg) | 290 |
| Gross (kg) | 400 |
| Packaging (in.) | 109.4 x 27.95 x 37 |
| Physical (in.) | 189.4 x 111 x 1 |
| Physical with Wall Mount (in.) | 189.4 x 111 x 2.2 |
| Packaging (mm) | 2780 x 710 x 940 |
| Physical (mm) | 4810 x 2820 x 25 |
| Physical with Wall Mount (mm) | 4810 x 2820 x 57 |
| Warranty | 5-year limited warranty on parts and labor, on-site service |
| Recycle/Disposal | Please dispose of in accordance with local, state or federal laws. |
| Package Contents | Power Cord x 2, Remote Control x1, QSG x1, Maintenance Tool (LD-MK-001) x 1, LAN Cable (Cat 5A) x 1, IR Extender Cable x 1, Spart Modules (LED PCB x 7), Wall Mount x 1 |
| Regulations | cTUVus, FCC, RoHS |

UPC: 766907014976



Contact Sales

[ViewSonic.com](https://www.viewsonic.com)

888.881.8781

email:

salesinfo@viewsonic.com