

Simplify Your Work with Just One Cable

Plug into pure productivity with ViewSonic's USB-C monitors. This new standard of connectivity does it all for you: from high-speed data transfer to convenient charging so you can stay on track at all times.



All You've Ever Needed in One Cable

USB-C delivers over 60W power, audio, video, and high-speed data transfer in a single, lightweight cord reducing all cable clutter (VGA, HDMI, DisplayPort).



Full-Power Charging

With over 60W power, charge your devices directly from your monitor.



Video, Audio, and Data Transfer

USB-C replaces HDMI, VGA, and DisplayPort into one, reducing all cable clutter.



High-Speed Connectivity

Simply plug and play and enjoy high speed transfer for all your tasks.



*Our product statement and data sheet regarding the characteristics, parameters, features, compatibility, and interoperability of our products, either standalone or with other devices or applications, are based on laboratory conditions and based on our knowledge of typical requirements in generic applications and devices, and may vary in a user application due to (i) the combination of our products with other components or devices in the user's application, or (ii) the environment of the user application itself, and may also vary in actual performance over time. Thus, before making any purchase or use of our products, users should always verify the actual performance of our products in their specific devices and applications and make their own independent judgments and verification tests.

Unlock More Advanced Benefits of ViewSonic USB-C Monitors

Display in High Resolution

The advanced USB-C monitor features a stunning 4K (3840 x 2160) or 2K (2560 x 1440) resolution with multiple ports offering additional connections for DisplayPort and HDMI. Embodying the golden standard of high color and stunning detail, this monitor is the perfect choice for digital artists, modern professionals, and master multitaskers.

► Recommended Products




VG2755-2K
27" WQHD
Advanced Ergonomics
Business Monitor



VP2756-4K
27" 4K UHD Pantone
Validated 100% sRGB
and Factory
Pre-Calibrated Monitor



VP2786-4K
27" UHD Fogra and
Idealliance Validated
Photo Editing and
Printout Monitor

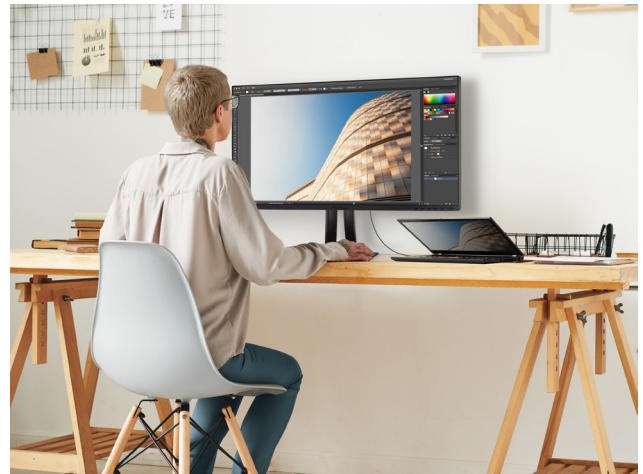

Full Speed Ahead with Connected Docking

ViewSonic's USB-C docking monitor is a hub for data, peripherals, and charging. Offering an extra stable network thanks to a built-in ethernet port, it also has daisy chain connection capability for an easy dual-monitor desk setup.

► Recommended Products



VG2456
24" Docking Monitor
featuring USB Type-C
and Ethernet



VG2756V-2K
27" QHD Webcam
Docking Monitor with
Built-in LED Fill
Lights and Two-way
Noise-reduction



VP2468a
24" Pantone
Validated 100%
sRGB Monitor with
Docking Station

Productivity on the Go

Set yourself free from traditional workspace limits. With USB-C bi-directional charging, power a portable monitor with your laptop and embrace the ease of travel and true mobility, moving from trade show to client meeting to cafe.

► Recommended Products



TD1655
16" Touch
Portable Monitor



VG1655
16" Business
Portable Monitor



VA1655
16" Essential
Portable Monitor



Explore All ViewSonic USB-C Monitors



	VA2409-MHU	VX2485-MHU	TD2455	VG2455
Power Delivery	65W	60W	60W	60W
Audiovisual and Data Transfer	Audiovisual	Audiovisual	Full	Full
USB-C (DP Alt Mode)	1	1	1	1
USB 3.2 Hub	-	-	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*3 Type B Upstream*1 Type C Upstream*1
Ethernet (RJ45)	-	-	-	-
Connectivity	VGA / HDMI 1.4	VGA / HDMI 1.4	HDMI 1/4 / DP / DP out	HDMI 1/4 / DP / DP out
Size / Panel Type	24" IPS	24" IPS	24" IPS	24" IPS
Resolution (max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Brightness (Typ.)	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	1,000:1	1,000:1	1,000:1	800:1
Dynamic Contrast Ratio	50M:1	80M:1	50M:1	50M:1
Response Time / Refresh Rate	3ms / 75 Hz	5ms / 75 Hz	6ms / 60Hz	5ms / 60Hz
Color Support	8 bit (6 bit + FRC)	8 bit (6 bit + A-FRC)	8 bit (6 bit + A-FRC)	8 bit (6 bit + FRC)
3.5mm Audio Out	V	V	V	-
Speaker	2Watts*2	3Watts*2	2Watts*2	2Watts*2
Consumption	22W	16W	9.7W / 12.8W	14.4W / 11.9W
ECO Mode (Optimise / Conserve)	19W / 18W	13W / 11W	17.9W	17.8W
Tilt / Swivel / Pivot	-3° - 20° / 0° / 0°	-5° - 20° / 60° / 0°	-5° - 60° / 0° / 0°	40° - -5° / 120° / 90°
Height Adjust (mm)	-	-	-	130



	TD1655	VG1655	VA1655
Power Delivery	60W	60W	60W
Audiovisual and Data Transfer	Audiovisual	Audiovisual	Audiovisual
USB-C (DP Alt Mode)	2	2	1
USB 3.2 Hub	-	-	-
Ethernet (RJ45)	-	-	-
Connectivity	Mini HDMI	Mini HDMI	Mini HDMI
Size / Panel Type	16" IPS	16" IPS	16" IPS
Resolution (max.) / Ratio	1920 x 1080 / 16:9	1920 x 1080 / 16:9	1920 x 1080 / 16:9
Brightness (Typ.)	250 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	800:1	800:1	800:1
Dynamic Contrast Ratio	50M:1	50M:1	50M:1
Response Time / Refresh Rate	6.5ms / 60Hz	6.5ms / 60Hz	7ms / 60Hz
Color Support	6 bit	8 bit (6 bit + FRC)	8 bit (6 bit + FRC)
3.5mm Audio Out	V	V	V
Speaker	0.8Watts*2	0.8Watts*2	0.8Watts*2
ECO Mode (Optimise / Conserve)	6.9W / 6W	7W	7W
Consumption	8W	6W/5.1W	6W/5.1W
Tilt / Swivel / Pivot	20° - 60° / 0° / 0°	20° - 60° / 0° / 0°	30° - 53° / 0° / 0°
Height Adjust (mm)	-	-	-

Explore All ViewSonic USB-C Monitors



	VG2755-2K	VG2456	VG2756V-2K	VP2776
Power Delivery	60W	60W	90W	90W
Audiovisual and Data Transfer	Full	Full	Full	Full
USB-C (DP Alt Mode)	1	1	1	1
USB 3.2 Hub	Type A Downstream*3 Type B Upstream*1 Type C Upstream*1	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*2 Type C Downstream*1 Type B Upstream*1 Type C Upstream*1 Micro USB*1
Ethernet (RJ45)	-	V	V	-
Connectivity	HDMI 1.4 / DP	HDMI 1.4 / DP / DP out	HDMI 1.4 / DP	HDMI 2.0 / DP
Size / Panel Type	27" IPS	24" IPS	27" IPS	27" IPS
Resolution (max.) / Ratio	2560 x 1440 / 16:9	1920 x 1080 / 16:9	2560 x 1440 / 16:9	2560 x 1440 / 16:9
Brightness (Typ.)	350 cd/m ²	250 cd/m ²	350 cd/m ²	400 cd/m ²
Contrast Ratio (Typ.)	1,000:1	1,000:1	1,000:1	1,000:1
Dynamic Contrast Ratio	80M:1	50M:1	80M:1	20M:1
Response Time / Refresh Rate	5ms / 60Hz	5ms / 60Hz	5ms / 60Hz	3ms / 165Hz
Color Support	8 bit true	8 bit (6 bit + A-FRC)	8 bit true	10 bit (8 bit + A-FRC)
3.5mm Audio Out	-	-	V	V
Speaker	2Watts*2	2Watts*2	5Watts*2	3Watts x2
Consumption	26.54W	13.7W	30.6W	39.5W
ECO Mode (Optimise / Conserve)	21.63W / 17.73W	11.68W / 9.95W	26.8W / 23.6W	36.3W / 33.4W
Tilt / Swivel / Pivot	40° - -5° / 120° / 180°	40° - -5° / 120° / 180°	40° - -5° / 120° / 180°	21° - -3° / 60° / 90°
Height Adjust (mm)	130	130	110	120



	VP2786-4K	VP2756-4K	VP2468a
Power Delivery	90W	60W	90W
Audiovisual and Data Transfer	Full	Full	Full
USB-C (DP Alt Mode)	1	1	1
USB 3.2 Hub	Type A Downstream*4 Type B Upstream*1 Type C Upstream*1 Micro USB*1	Type A Downstream*2 Type B Upstream*1 Type C Upstream*1	Type A Downstream*2 Type C Upstream*1
Ethernet (RJ45)	-	-	V
Connectivity	HDMI 2.0 / DP	HDMI 2.0 / DP	HDMI 1.4 / DP
Size / Panel Type	27" IPS	27" IPS	24" IPS
Resolution (max.) / Ratio	3840 x 2160 / 16:9	3840 x 2160 / 16:9	1920 x 1080 / 16:9
Brightness (Typ.)	350 cd/m ²	350 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	1,300:1	1,000:1	1,000:1
Dynamic Contrast Ratio	20M:1	20M:1	20M:1
Response Time / Refresh Rate	5ms / 60Hz	5ms / 60Hz	5ms / 60Hz
Color Support	10 bit true	10 bit (8 bit + A-FRC)	8 bit (6 bit + A-FRC)
3.5mm Audio Out	V	V	V
Speaker	3Watts x2	2Watts x2	-
Consumption	67W	24W	13.9W
ECO Mode (Optimise / Conserve)	55W / 45W	21.5W / 19.3W	10.8W / 8.94W
Tilt / Swivel / Pivot	21° - -3° / 60° / 90°	40° - -5° / 120° / 90°	21° - -5° / 130° / 90°
Height Adjust (mm)	120	130	130