
VP2765-LED

27" PROFESSIONAL LED MONITOR WITH AMVA PANEL TECHNOLOGY

Professional-grade monitor for pros.

The VP2765-LED is one of ViewSonic's new LED Professional Series monitors that utilizes the power of true AMVA panel technology. High contrast ratio and super wide 178/178 degree viewing angles. This coupled with 1920x1080 resolution, makes the VP2765-LED the ultimate professional grade LCD monitor for medical facilities, scientific design, digital art, video production, architecture and any application where true color and total screen viewing is essential. Features DisplayPort and DVI inputs and 4-port USB hub for cluster free connectivity, ergonomic functions with pivot, height adjust, tilt, swivel and slim bezel make the VP2765-LED an amazing monitor.

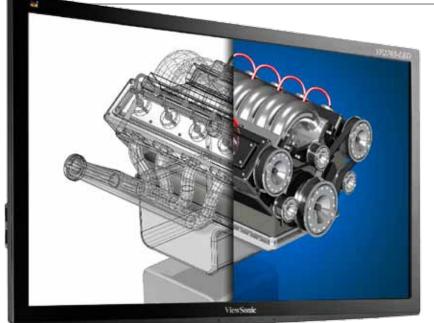

A HARD WORKING TOOL

- > Full 27" widescreen with 1080p 16:9 aspect ratio and auto detect 4:3 image view.
- > 178/178 degree super wide viewing angles No image distortion or colour shifting even at extreme angles.
- Real color everywhere Capture true colours even from 178 degree angles with the VP2765-LED's AMVA panel.
- > Up to 50% enery savings with LED backlight*

> Connections, connections

Display Port and DVI-D digital inputs, as well as, 4-port USB hub provides all the connectivity you need to stay focused on the real work.

> Full ergonomics

Pivot, height adjust, tilt and swivel for perfect ergonomics and comfort.

> Slim bezel for multi-monitor applications Seamless viewing for larger formats and increased productivity with multiple window options.





VP2765-LED 27" PROFESSIONAL LED MONITOR WITH AMVA PANEL TECHNOLOGY









CERTIFIED

BZ02

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD. ((

LCD	Туре	68cm / 27" Color TFT active matrix AMVA LED
	Display Area	60cm horizontal x 34cm vertical; 68cm diagonal
	Optimum Resolution	1920x1080
	Contrast Ratio	Í 000:1 static (typ), 20,000,000:1 dynamic
	Viewing Angles	178º horizontal, 178 vertical @ contrast ratio > 10:1
	Response Time	F2ms (typ)
	Light Source	Long life, 30,000 hrs. (typ)
	Brightness	300 cd/m ² (typ)
	Panel Surface	Anti-glare
VIDEO INPUT	Analog / Digital	RGB analog (75 ohms, 0.7/1.0 Vp-p)/ DVI-D (HDCP) / DisplayPor
	Frequency	F _h : 24~83kHz, F _v : 50~75Hz
	Sync	H/V separated (TTL), composite, sync-on-green
COMPATIBILITY	PC	VGA up to 1920x1080 non-interlaced
	Mac®†	Power Mac [™] up to 1920x1080
CONNECTOR	Analog / Digital	15-pin mini D-sub / DVI-D / DisplayPort
	USB	V2.0, 1-up/4-down
	Power	Internal power; 3-pin AC plug (CEE22)
POWER	Voltage	AC 100–240V, 50–60Hz (auto switch)
	Consumption	45W (typ), 33W (Eco-mode)
CONTROLS	OnView®	Auto image adjust, contrast, brightness, input select (D-SUB, DVI), color adjust (sRGB, 9300K, 7500K, 6500K, 5000K, User color [R, G, B]), information, manual image adjust (H/V position, horizontal size, fine tune, sharpness, dynamic contrast, aspect ratio, eco mode), setup menu (language select, resolution notice, OSD position, OSD time out, OSD background) memory recall
ERGONOMICS		Height adjustment range 13.5cm, tilt –5°/+20°, swivel range 120°, pivot 0–90°
OPERATING	Temperature	32–104°F (0–40°C)
CONDITIONS	Humidity	20–90% (non-condensing)
DIMENSIONS	Physical with stand	642mm x 466mm x 388mm
(W x H x D)	Physical without stand	642mm x 391mm x 65mm
	Packaging	732mm x 570mm x 451.8mm
WEIGHT	Net with stand	8.5 kg
	Net without stand	5.4 kg
	Gross	12.0 kg
VESA [®] MOUNT		100mm x 100mm
REGULATIONS		UL, CUL, FCC-B (ICES), CB, CE, CEL, TUV-S, NOM, GOST-R, HYGIENIC, CECP, CCC, BSMI, PSB, C-TICK, SASO, WEEE, RoHS, ErP, ENERGY STAR [®] , TCO 5.1, EPEAT-Silver, Ukraine, REACH
PACKAGE CONTENTS		LCD display, power cable, VGA cable, DVI cable, Quick Start Guide, ViewSonic Wizard CD





For more product information, visit us on the web at www.viewsoniceurope.com