


## VG2753 - 27" 1080P ERGONOMIC IPS MONITOR WITH HDMI AND DISPLAYPORT

### Key Features

---


- SuperClear IPS Panel Technology
- Seamless Viewing Experience
- Versatile Connectivity
- Ergonomic Design
- Full HD 1080p Resolution




27  
DISPLAY



IPS  
PANEL



1920 x 1080  
RESOLUTION

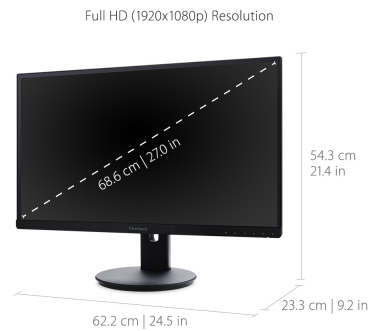

### Product Description

---

With future-proof connectivity and advanced ergonomics, the ViewSonic® VG2753 is a productivity-boosting monitor perfect for corporate, government, and education environments. Designed with SuperClear® IPS panel technology for wide-angle viewing and incredibly vivid colors, this monitor also features a 3-sided frameless design for a seamless viewing experience in multi-monitor setups. For maximum comfort and a customized fit, a robust fully ergonomic stand gives you tilt, pivot, swivel, and height-adjustable options. In addition, VDI client endpoints can be easily attached to the stand's integrated client mount, saving desktop space and minimizing cable clutter without interfering with ergonomic functionality. Extensive connectivity options include VGA, HDMI, DisplayPort, and Mini DisplayPort so that you can connect to a variety of HD and analog devices - today and tomorrow.

### Specifications

---

<b>UPC</b>	766907857016
<b>Screen Size</b>	27
<b>Viewable Area (in.)</b>	27
<b>Panel Type</b>	IPS
<b>Display Resolution</b>	1920 x 1080
<b>Static Contrast Ratio</b>	1,000:1
<b>Dynamic Contrast Ratio</b>	20M:1
<b>Light Source</b>	LED
<b>Brightness</b>	250 cd/m2
<b>Colors</b>	16.7M
<b>Color Space Support</b>	6-bit+A-FRC
<b>Aspect Ratio</b>	16:9
<b>Response Time (Typical GTG)</b>	14ms
<b>Response Time (GTG w/OD)</b>	7ms
<b>Viewing Angles</b>	178° horizontal, 178° vertical
<b>Backlight Life (Hours)</b>	30,000
<b>Panel Surface</b>	Anti-glare, hard-coating (3H)
<b>PC Resolution (max)</b>	1920 x 1080
<b>USB Type A</b>	2
<b>USB Type B</b>	1
<b>3.5mm Audio In</b>	1
<b>3.5mm Audio Out</b>	1
<b>VGA</b>	1
<b>HDMI 1.4 In</b>	1
<b>DisplayPort</b>	1
<b>Mini DisplayPort</b>	1
<b>Internal Speakers</b>	2W (x2)
<b>Eco Mode (Conserve)</b>	19
<b>Eco Mode (optimized)</b>	24
<b>Consumption (typical)</b>	27
<b>Consumption (max)</b>	45
<b>Voltage</b>	AC 100-240V (universal), 50-60Hz
<b>Stand-by</b>	0.5W
<b>Cable Organization</b>	No
<b>Kensington Lock Slot</b>	1
<b>Physical Controls</b>	1,2, Up, Down, Power

<b>On Screen Display</b>	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)
<b>Temperature</b>	32-104° F (0 - 40° C)
<b>Humidity (non-condensing)</b>	20-90%
<b>VESA Compatible</b>	100 x 100 mm
<b>Frequency Horizontal</b>	15 ~ 86KHz
<b>Frequency Vertical</b>	24 ~ 76Hz
<b>Analog Sync</b>	Separate Sync / Composite Sync / Sync on Green
<b>Digital Sync</b>	TMDS (HDMI 1.4), PCI-E (DisplayPort v1.2 & Mini DP v1.2)
<b>Height Adjust</b>	130 mm / 5.1 in
<b>Swivel</b>	360°
<b>Pivot (Right/Left)</b>	90° / 0°
<b>Tilt (Forward/Back)</b>	5° / 20°
<b>Net (lbs)</b>	14.1
<b>Net Without Stand (lbs)</b>	9.6
<b>Gross (lbs)</b>	19.3
<b>Net (kg)</b>	6.4
<b>Net Without Stand (kg)</b>	4.3
<b>Gross (kg)</b>	8.7
<b>Packaging (in.)</b>	29.3 x 18.6 x 8.0
<b>Physical (in.)</b>	24.5 x 21.4 x 9.2
<b>Physical Without Stand (in.)</b>	24.5 x 14.7 x 2.1
<b>Packaging (mm)</b>	744 x 472 x 202
<b>Physical (mm)</b>	622.0 x 543.2 x 233.3
<b>Physical Without Stand (mm)</b>	622.0 x 372.2 x 53.2
<b>Regulations</b>	cULus, FCC-B, ICES003, Energy Star 7.0, EPEAT, MX-CoC, Mexico Energy, CE EMC, CB, RoHS Green BOM & RoHS2 DoC, ErP, REACH SVHC List & DoC, WEEE, EAC, GS
<b>Package Contents</b>	LCD Display, Power Cable , Mini DP to DP Cable , USB3.0 Upstream Cable , Quick Start Guide, ViewSonic Wizard CD-ROM
<b>Recycle/Disposal</b>	Please dispose of in accordance with local, state or federal laws.

UPC: 766907857016



## Contact Sales

[ViewSonic.com](http://ViewSonic.com)

888.881.8781

email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)